

The first environmentally safe landing gear




A440 MAGNUM

Requires no lubrication for five years!!!

Maximum Static Load Rating:
*170,000 lbs.

Rated Lift Capacity:
62,500 lbs.
w/100ft-lbs input torque

Side Load Capacity:
*33,000 lbs. per set

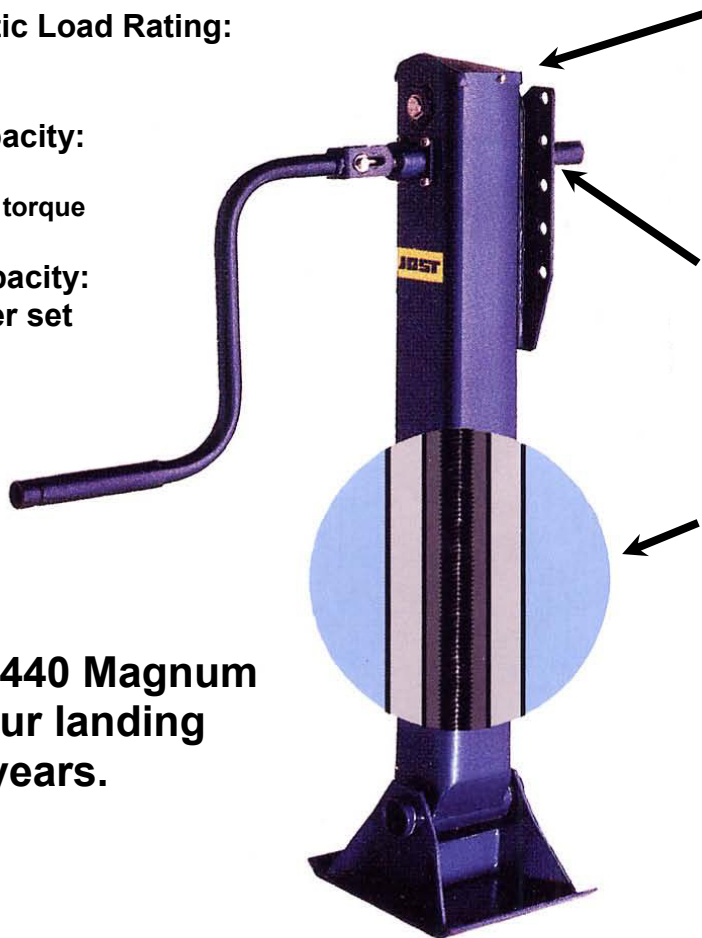

The gear box is completely filled with an arctic grade, all weather white grease.

The legs are completely sealed to keep water out.

Seals are used to keep water from rotating shafts.

The elevating screws are completely encased by a grease tube.

Each time the legs are extended and retracted, the screws will receive a fresh coating of grease.

Gear Ratio:

Low: 32 turns = 1" travel

High: 3.5 turns = 1" travel

Specify the A440 Magnum and forget your landing gear for five years.

The reasons are simple



See reverse side for order information

*When properly braced on a trailer.

MAGNUM LANDING GEAR

www.jostinternational.com

A440R T1 17 38

Landing Gear Product Line Prefix

Mounting Style

Leg Speed

Footwear


Travel

Options

A44

14 - 14" Travel
17 - 17" Travel
19 - 19" Travel


05 - Removable crank
38 - Removable cushion foot for G or G3

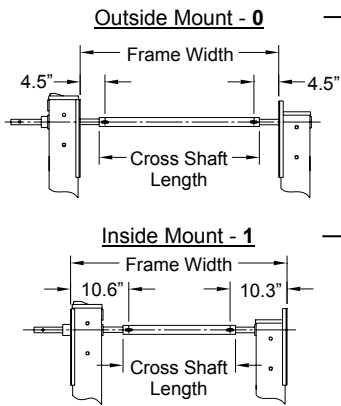


†Leave Blank for Both Legs
R.H. Two Speed Leg - R
L.H. One Speed Leg - L

† When ordering both legs; crank, crank hanger, brace lugs and a cross shaft are included but need to be specified (see below).


"G" Series - Cushion Foot

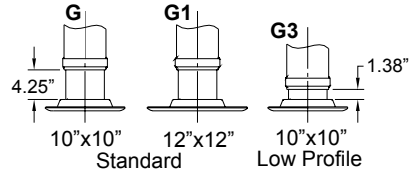

"T" Series - Sand Shoe

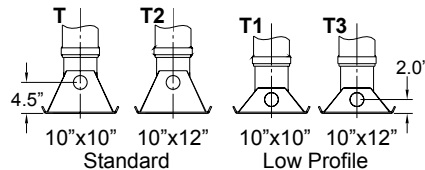

Cross Shaft



B10363.59.4


Inside Mount - B10363
Outside Mount - B10066

Length (in)
Standard Inside Mount = 56.5"
Standard Outside Mount = 68.4"
(If other length is desired see note).


Inside Mount Example: 78.9" - 19.5" = 59.4"
Frame Width = 78.9" Overall Length = 59.4"

Note:
Cross Shaft Length =
Frame width - 19.5" (for Inside mount)
- 7.6" (for outside mount)

Travel Dimensions

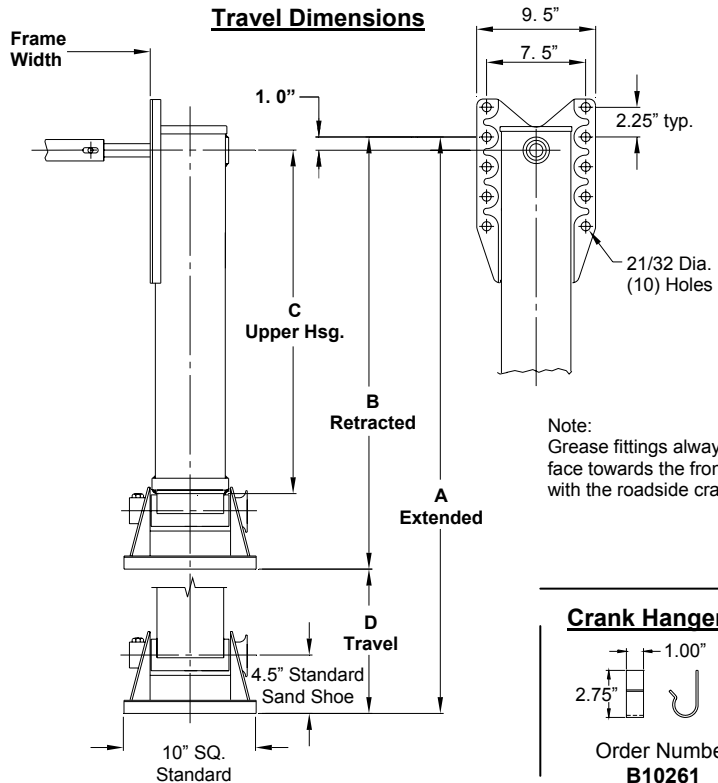

Crank

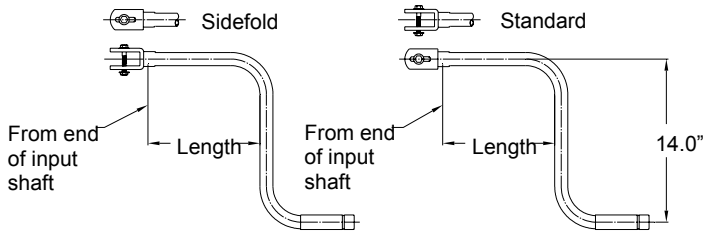


C10592.1

Standard - C10592
Sidefold - C10591

Length
1 - 5 1/4"
2 - 8 1/4" (Standard)
3 - 10 1/2"
4 - 17 3/4"
5 - 14 3/4"

Crank Hanger



Order Number
B10261

D Travel	Standard Footwear		Low Profile (Sand Shoe)		Low Profile (Cushion Foot)		C Upper Hsg.
	A1-Extended	B1-Retracted	A2-Extended	B2-Retracted	A3-Extended	B3-Retracted	
14"	42 5/8"	28 5/8"	40 1/8"	26 1/8"	39 3/4"	25 3/4"	21 15/16"
17"	48 5/8"	31 5/8"	46 1/8"	29 1/8"	45 3/4"	28 3/4"	24 15/16"
19"	52 5/8"	33 5/8"	50 1/8"	31 1/8"	49 3/4"	30 3/4"	26 15/16"

The right to alter specifications is reserved.



1770 Hayes Street
Grand Haven, MI 49417
www.jostinternational.com

Ph. (616) 846-7700 (800) 253-5105
Fax (616) 846-0310

LT LG440-01 RevF