

A silhouette of a truck is shown against a sunset sky. The truck is on the left, and its reflection is visible in a body of water on the right. The sky is a mix of orange, yellow, and blue.

Bolt In Style Kingpin

JOST bolt in kingpins are suitable for OEM and aftermarket replacement. Once the retention plate is installed the kingpin can be easily replaced in minutes by just removing the mounting bolts. The retention plate is intended to be incorporated into the design of the upper coupler structure similar to that of an SAE mushroom style weld in kingpin. It must be welded using a procedure published by the American Welding Society, or other technical organization.


When properly installed bolt in kingpins will meet or exceed the performance requirements of the Federal Motor Carrier Safety Regulations (FMCSR), The Society of Automotive Engineers (SAE) and the Truck and Trailer Manufacturers Association (TTMA).



Design Features


- Bolt in kingpins allow for easy and fast replacement of the kingpin, and at much less cost than weld in kingpins.
- The kingpin flange and bolts are recessed in the retention plate reducing the possibility of center loading of the fifth wheel.
- JOST kingpins are manufactured and inspected using the most stringent safety requirements.
- The retention plate is manufactured from ST-52-3 Steel (similar to ASTM A572 Grade 50).

Bolt In Style Kingpin

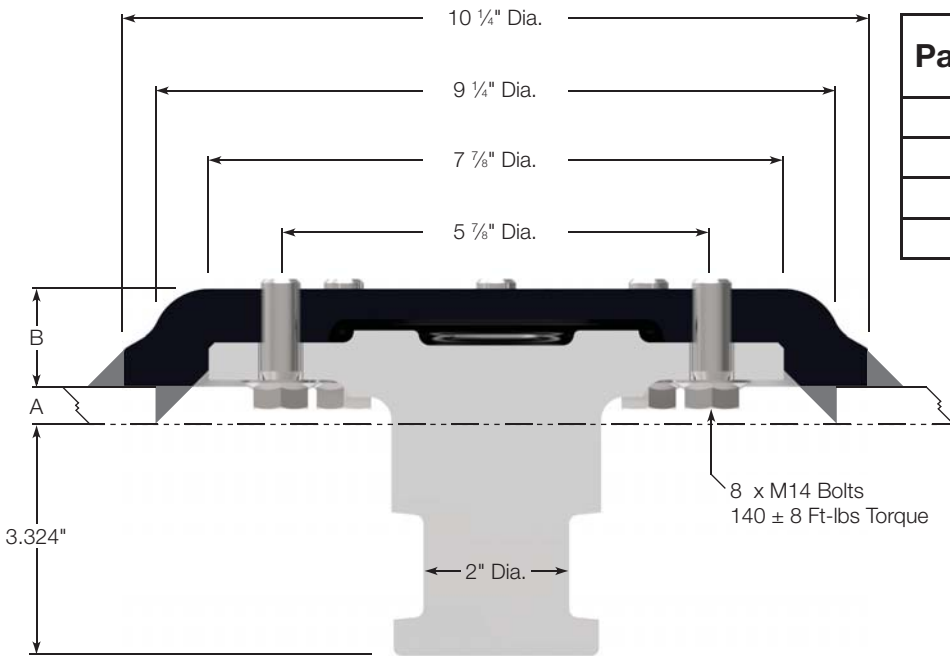

Part Number	Dimension A Bolster Plate	Dimension B
KZ 1007	1/4" (7 mm)	1 15/32" (37 mm)
KZ 1008	5/16" (8 mm)	1 15/32" (37 mm)
KZ 1010	3/8" (10 mm)	1 11/32" (34 mm)
KZ1012	1/2" (12 mm)	1 5/16" (33 mm)

Assembly Part Number	Retention Plate (A) Part Number	Kingpin (B) Part Number	Bolt (C) Part Number
KZ 1007	KZ 1007-02	KZ 1012-01	KZ 1012-03
KZ 1008	KZ 1008-02	KZ 1012-01	KZ 1012-03
KZ 1010	KZ 1010-02	KZ 1012-01	KZ 1012-03
KZ 1012	KZ 1012-02	KZ 1012-01	KZ 1012-03

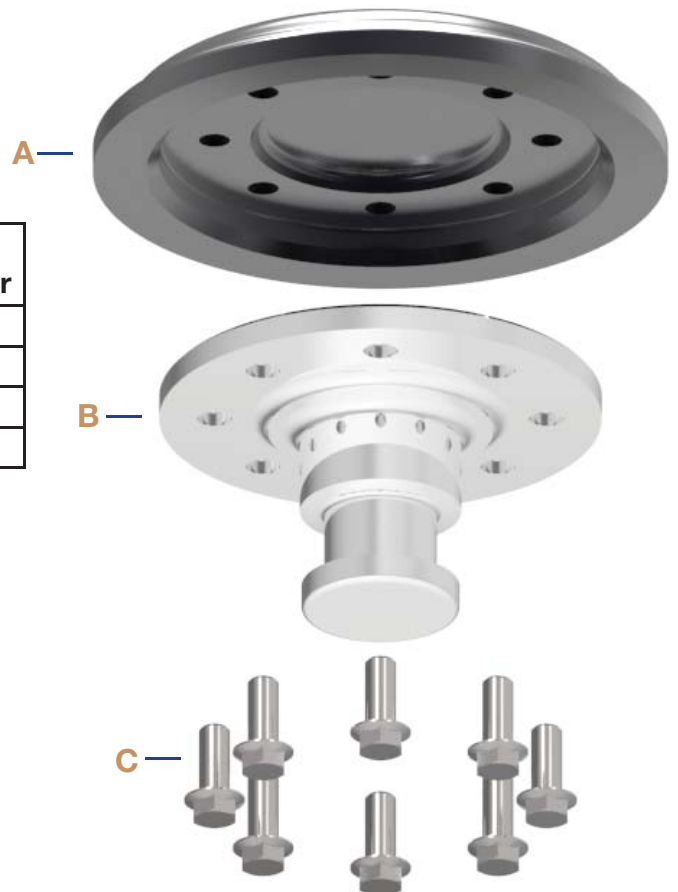

The kingpin retention plate installation must conform to SAE and TTMA recommended practices.

Bolts must be tightened and properly torqued as described in the product information details. For safety reasons the bolts should only be tightened and torqued once. If removed they should be replaced.